

Security Systems

C100L SWING SPEEDLANE TURNSTILE (LONG FLAP) | **C100L**

Optima C100L long glass gate turnstiles are suitable for installations where security and aesthetics are both main concerns. Typical installation areas are governmental, commercial and military buildings, office centers, hotels, etc.



SYSTEM FEATURES

MODEL	C100L
Cabinet	Main body is AISI 304-grade stainless steel (optional black stainless steel)
Side Cover	Plexiglass
Top Cover and Flap	Tempered glass
Maintenance	Lateral covers are removable for easy maintenance
Control	Optima Control Card
During Operation	Low power consumption and silent running
Alarm System	Turnstile is equipped with an alarm system which senses forbidden and reverse direction passing
Adjustable Automatic Close	Turnstiles closes flaps by itself after adjusted time if a valid card is presented but person not passed
Obstacles Detection	All the obstacles in the passage are sensed with photoelectric sensors
Usage Area	Indoor use only
Integration	Compatible with all access control systems
Power Failure	Turnstile opens in two directions
Power Consumption / Insurance Value	200 W / 1 Amper Fuse
Environmental Conditions and Power Requirements	Between -15 °C and +65 °C, 95% non-condensing humidity; 220 V +/-10%, mono phase, 50-60 Hz


ACCESSORIES

Accessories marked with (*) are optional.

- SCADA or any control system: It is possible to change and check the position of turnstile with touch screen control panel *
- Optima Cloud. To control turnstile by mobile devices (ios-android), computer, etc *
- Uninterrupted power supply (UPS) *
- Logo print on the flaps *
- Sound signaling device (buzzer) *
- Card reader mounting plate with pedestal or on the turnstile *
- Card reader system *
- Stainless steel railing *
- Digital counter *
- Push button box *

BODY MEASUREMENTS

FRONT VIEW

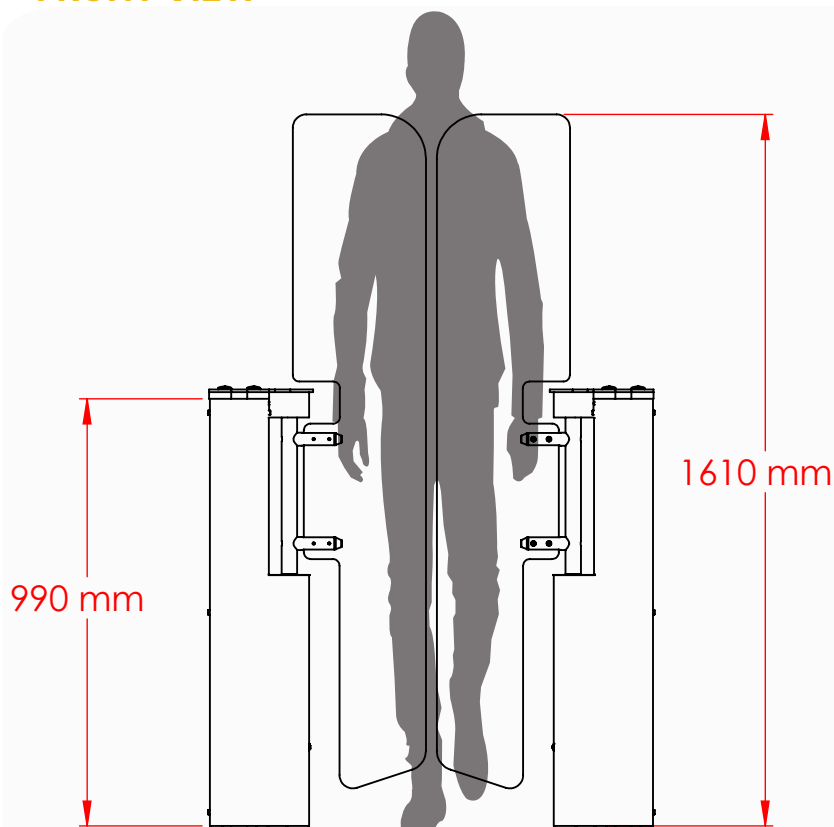

TOP VIEW

